Instruction Sheet for Assembly and Installation of Sora Suspended with Wings

READ AND UNDERSTAND THESE INSTRUCTIONS BEFORE PROCEEDING.
RETAIN THESE INSTRUCTIONS FOR MAINTENANCE REFERENCE.

This fixture is intended for installation in accordance with the National Electrical Code and local regulations. To assure full compliance with local codes and regulations, check with your local electrical inspector before installation. To prevent electrical shock, turn off electricity at electrical panel before proceeding.

DO NOT INSTALL THIS SYSTEM IN A WET OR DAMP LOCATION.
DO NOT ENERGIZE ANYTHING OTHER THAN THE FIXTURES IN THE SYSTEM.

CONTRACTOR IS RESPONSIBLE FOR ADEQUATELY REINFORCING CEILING TO SUPPORT FIXTURE WEIGHT.

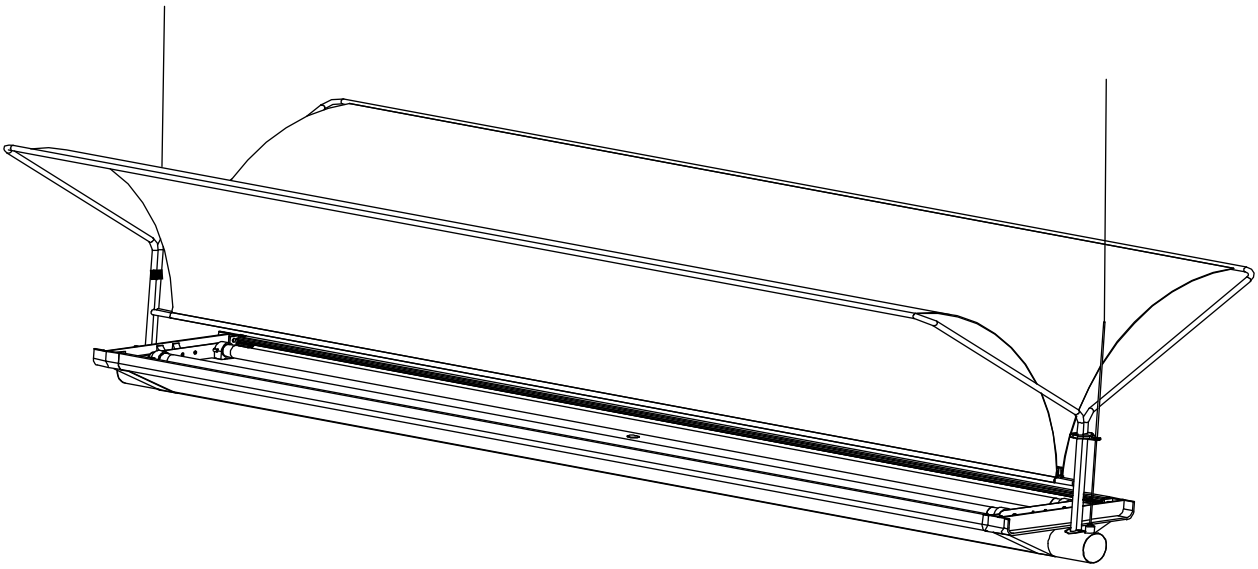

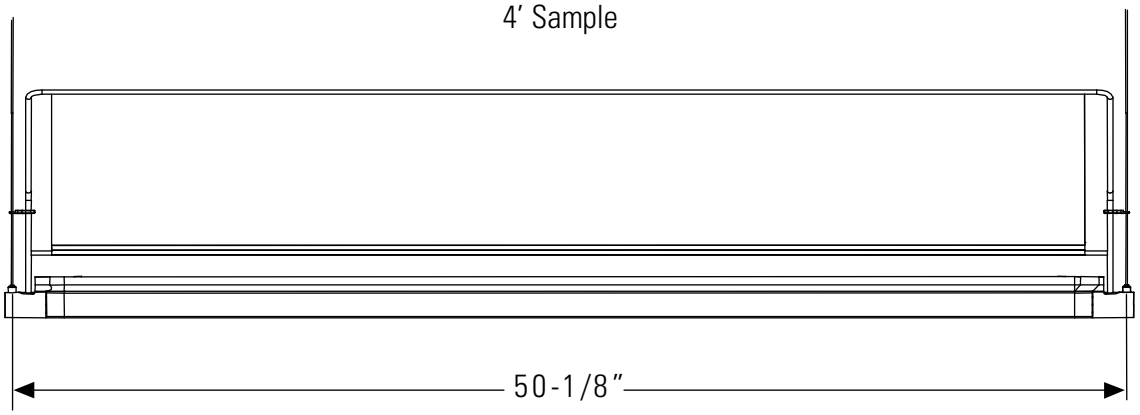

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B1108

Step 1. Installing the Suspension

A. Install the suspension assembly to the junction box. (Fig. 1)
B. The first suspension in each run should be from the power feed end set, which contains power cord and an end cap. (Fig. 2)
C. Install the intermediate suspension assemblies to the ceiling at the following on center dimensions:
   For 4ft: 4'-2-1/8" OC
   For 8ft: 8'-5-3/8" OC
   For 12ft: 12'-8-3/4" OC
D. At the end of each run, install the non-power feed end set.

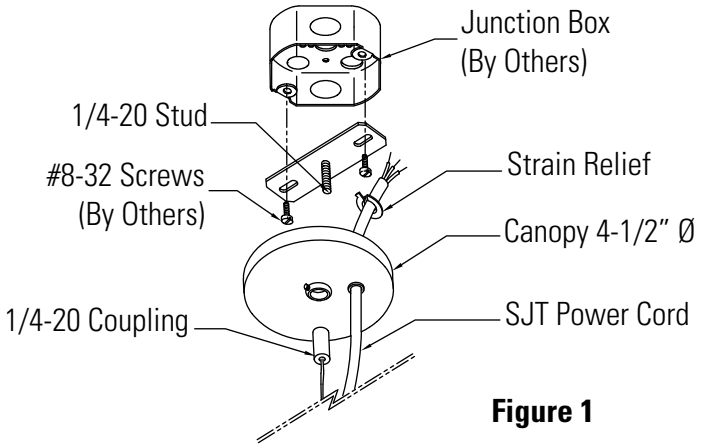

Figure 1

Step 2. Installing the First Fixture

A. Unscrew Lightolier fascia plate and slide the end cap onto the fixture. (Fig. 2)
B. Secure the end cap by tightening the set-screw located behind the previously removed fascia plate.
C. Slide the fascia plate back into place and secure it by tightening the (2) screws.
D. Remove the reflector and slide the power feed through it. Connect the wires, add strain relief, and secure the reflector back into the fixture. (Fig. 3)

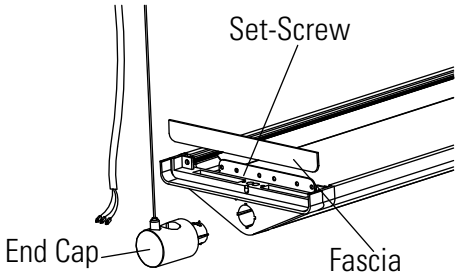

Figure 2

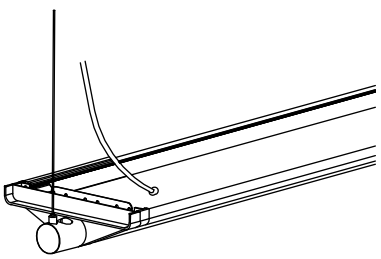

Figure 3

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B1108

Step 3. Installing the Remaining Fixtures

A. Connect the wiring between fixtures before sliding the fixtures together (Fig. 4)

B. After each addition to your run tighten down the set-screws on both fixtures as done for the power feed end cap. (Fig. 4)

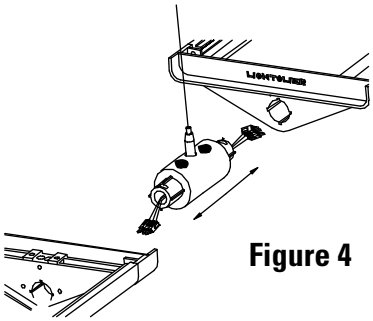

Figure 4

Step 4. Installing the End Cap

A. Install the non-power end cap to the end of run. (Fig. 5) Refer to Step 2 for instructions.
Note: For continuous runs note orientation of the prongs before wire frame is secured to end cap. (Fig. 8)

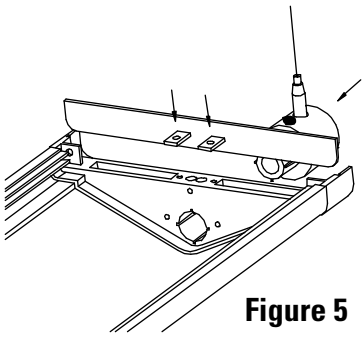

Figure 5

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B1108

Step 5.

A. Lower double wing frame over the fixture and insert the bottom of the frame into the hole in the end casting. (Fig. 6) Insert suspension cable between prongs of the wing stabilizing bracket. (Fig. 7)

Step 6.

A. Insert the socket head screw into the wing frame base and tighten it using a 3/32" Ball-Point Hex L-Key. (Fig. 7)

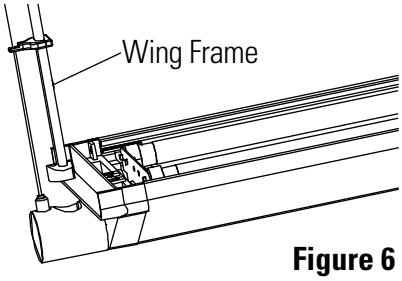

Figure 6

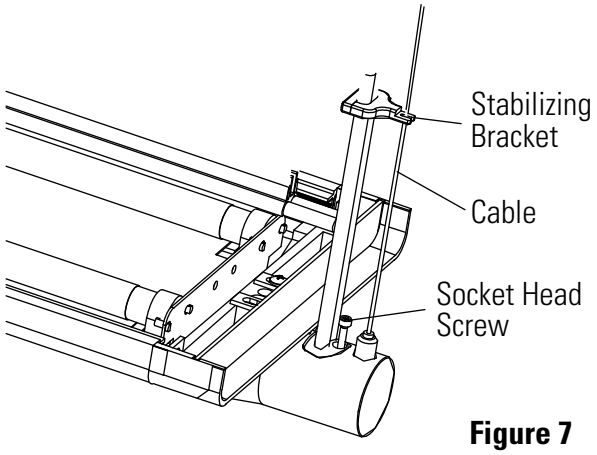

Figure 7

Step 7.

A. Take the wing gauge out of the carton and fold it on the scored lines. Place it under the wing and adjust the wing to match the profile of the gauge. (Fig. 9)

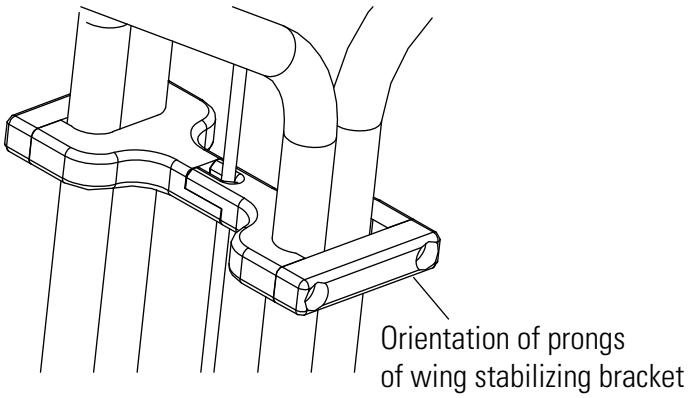

Figure 8

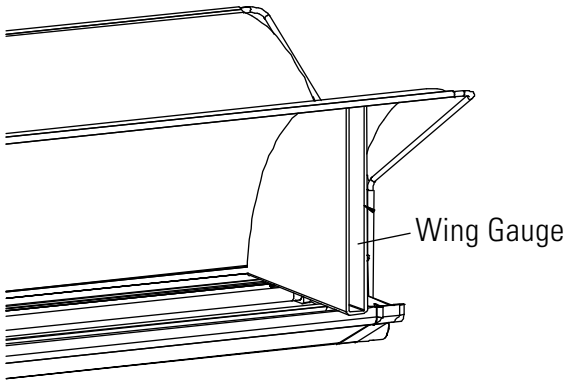

Figure 9

631 Airport Road, Fall River, MA 02720 • (508) 679-8131 • Fax (508) 674-4710
We reserve the right to change details of design, materials and finish.
www.lightolier.com © 2008 Philips Group • B1108